

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.

THIS PAGE BLANK (USPTO)




PCT/GB00/02868



INVESTOR IN PEOPLE

GB00/02868

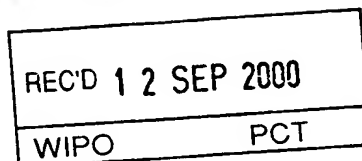

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ


4

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

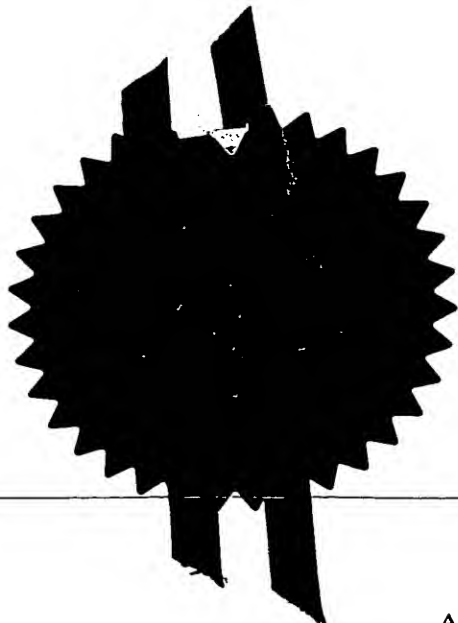

Signed

Dated

25.8.00

2

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

THIS PAGE BLANK (USPTO)

Pa 29 JUL 1999 14:29

The
Patent
Office

No. 8424 P. 3

Patents Act 1977
(Rule 16)**Request for grant of a patent**

(Please read the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

THE PATENT OFFICE
A
29 JUL 1999
RECEIVED BY FAX

The Patent Office

29 JUL 99 E465610-1 002613

0.00 - 9917736.2
Newport
Gwent NP9 1RH**1. Your reference**

BR/JM/MSEL/PO7UK

2. Patent at
(The Patent)**9917736.2**

29 JUL 1999

3. Full name, address and postcode of the or of each applicant (underline all surnames)Munster Simms Engineering Limited
277-279 Old Belfast Road,
Bangor
BT19 1LT, County Down, Northern Ireland, U.K.

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Northern Ireland, United Kingdom

4. Title of the invention

DIAPHRAGM PUMPS

5. Name of your agent (if you have one)

ANSONS

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

240 Upper Newtownards Road
Belfast
BT4 3EU
Northern Ireland
United Kingdom

Patents ADP number (if you know it)

5572169001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)**7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application**

Number of earlier application

Date of filing
(day / month / year)**8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:**

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

YES

See note (d))

9. Enter the number of sheets for each of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description


Claim(s)

Abstract

Drawing(s)

6

7

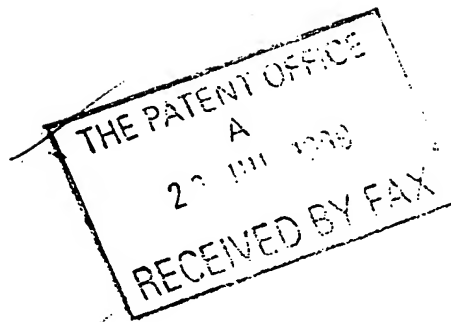

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 29.07.99

12. Name and daytime telephone number of person to contact in the United Kingdom

Bruce Robertson - 01232 656103

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DIAPHRAGM PUMPS

This invention relates to a diaphragm pump incorporating a wobble plate.

Accordingly, the present invention is a diaphragm pump comprising a two part casing formed of a front cover and a back cover, a diaphragm plate extending across the covers and being secured therebetween when the covers are fastened together, the diaphragm plate having a plurality of similarly defined circular regions, the front
5 cover having substantially axially aligned inlet and outlet ports, each leading to mutually exclusive inlet and outlet chambers respectively, a valve housing securable inside the front cover and having defined therein an outlet dished valve seat with a correspondingly concave resilient valve seated therein, the outlet valve seating having fluid passages therethrough, and a plurality of inlet valve seats, equal in
10 number to the number of regions, each being similarly dished and having a correspondingly concave resilient valve seated therein, each inlet valve seat having fluid passages therethrough, the outlet valve being in fluid communication with the outlet chamber and the inlet valves being in fluid communication with the inlet chamber, and a wobble plate positioned in the back cover and having a central boss
15 and a plurality of similar piston sections equal in number to the number of circular regions on the diaphragm, the piston sections and circular regions being correspondingly secured together, the wobble plate being subject to nutating motion to cause reciprocating action by the circular regions and provide a pumping action.

Preferably, the circular regions of the diaphragm are each provided with an
20 outstanding lug formation and the mating surfaces of the piston sections of the wobble plate are provided with complimentary shaped slots, the securement being formed when the lug formation of each region is engaged in the slot of the corresponding piston section. The lug formation of each diaphragm and the slot of

each corresponding piston section is beneficially of cruciform shape. The outer ends of the lug formation are desirably of greater length than the slots to provide a locking means in the slots. A rear diaphragm support plate may be provided in the back cover, the support plate having an equal number of similar apertures to the number of circular regions, each aperture having a walled surround, the circular regions fitting into respective apertures and being supported thereby.

Preferably also, the wobble plate boss seats and holds a bearing having a ball race, the boss having an inwardly-extending retaining flange.

Preferably also, the casing is secured to an electric motor with the drive shaft connected to the bearing. The casing has desirably a mounting bracket with a series of mounting feet fitted thereto, the feet each being substantially ovoid in plan and of resilient material, the greater dimensioned end having an upstanding headed stub pillar, each pillar mating in a open slot in the bracket, the slot being narrower at its open end to hold the respective foot in its slot. The feet are desirably similarly provided with at least one fixing hole at their narrower end and being capable of rotating about their respective mating slot.

Preferably further, the valve housing is fixed to the front cover by a screw. An integral pressure switch is beneficially provided in the back cover with the diaphragm plate being provided with a fifth defined circular region, smaller than the others, the rear diaphragm support plate having a similarly shaped aperture with wall surround to accommodate a micro-switch activated by movement of the fifth circular region serving as a pressure switch pad, the electrical wires to the micro-switch being fed internally from the front face of the motor. The valve housing, on the same side as the inlet valve seats are positioned, is preferably provided with a track leading from a hole exiting on that side and centrally provided in the outlet valve seat provided on the opposite side, the track mating with a corresponding track provided on the diaphragm plate, the mated tracks forming a passage between the hole and the fifth

circular region whereby any fluid leaving the outlet chamber when under pressure through the screw travels along the passage and fills a void at the pressure pad on the opposite side of the diaphragm plate from the pressure switch causing activation of the micro-switch to stop the pump.

5 An embodiment of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

Figs. 1A and 1B are perspective views from above and from below of a front cover of a diaphragm pump according to the present invention;

10 Figs. 2A and 2B are respectively perspective views from above and from below of a back cover of the pump;

Figs. 3A and 3B are respectively perspective views from above and from below of a valve housing of the pump;

Figs. 4A and 4B are respectively perspective views from above and from below of a diaphragm plate of the pump;

15 Figs. 5A and 5B are respectively perspective views from above and from below of a diaphragm support plate of the pump;

Figs. 6A, 6B and 6C are respectively a perspective view from above, a perspective view from below, and a cross-sectional view of a wobble plate of the pump;

20 Figs. 7A and 7B are respectively a perspective view from above and from below of an eccentric positioned between a wobble plate and the drive shaft of an electric motor; and

Fig 8 is a perspective view of an assembled pump.

25 Referring to the drawings, a diaphragm pump comprises a two part casing formed of a front cover 10 and a back cover 12. A diaphragm plate 14 extends across and between the covers 10, 12 and is secured therebetween when the covers

10, 12 are fastened together by screw fasteners 13. The diaphragm plate 14 has a plurality of four similarly defined circular regions 16.

The front cover 10 has substantially axially aligned inlet and outlet ports 18, 20, each leading to a mutually exclusive inlet and outlet chambers 22, 24, respectively. The outlet chamber 24 is provided centrally of the front cover 10 and has a wall surround 25 through which the outlet port 20 communicates. The inlet chamber 22 is defined between the wall surround 25 and a wall of the front cover 10.

A valve housing 26 is substantially planar and is secured inside the front cover 10 and has defined therein on one side an outlet dished valve seat 28 with a correspondingly concave resilient valve 30 seated therein. The outlet valve seat 28 has a gridded area 32 forming fluid passages therethrough and a central hole 72. On the opposite side of the housing 26, a plurality of four inlet valve seats 34 are provided, each being similarly dished and having a correspondingly concave resilient valve 36 seated therein, each inlet valve seat 34 having arcuate gridded areas 38 forming fluid passages therethrough and a central hole 73. The outlet valve seat 28 is in fluid communication with the outlet chamber 24 and the inlet valve seats 34 are in fluid communication with the inlet chamber 22. Each valve 36 is formed of a dished, part-spherical portion having a post 35 radially outstanding from its rear face, the post having a bulbous portion 37, the valve being seated by the post 35 being pushed through the hole 73 with the bulbous portion 37 holding the valve in position preventing unintentional removal.

A wobble plate 40 is positioned in the back cover 12 and has a central boss 42 and a plurality of four similar piston sections 44. The piston sections 44 and circular regions 16 are correspondingly secured together. The wobble plate 40 is subject to nutating motion to cause reciprocating action by the circular regions 16 of the diaphragm plate 14 and provide a pumping action.

The circular regions 16 of the diaphragm 14 are each provided with an outstanding lug formation 46 and the mating surfaces of the piston sections 44 of the wobble plate 40 are provided with complementary shaped slots 48. The securement between them is formed when the lug formation 46 of each region 16 is engaged in
5 the slot 48 of the corresponding piston section 44. The lug formation 46 of each diaphragm 14 and the slot 48 of each corresponding piston section 44 is of cruciform shape. The outer ends of the lug formation 46 are of greater length than the slots 48 to provide a locking means with the slots 48.

A rear diaphragm support plate 50 is provided in the back cover 12, the
10 support plate 50 having four similar apertures 52. Each aperture 52 has a walled surround with the circular regions 16 fitting into respective apertures 52.

The boss 42 of the wobble plate 40 seats and holds a bearing 54 having a ball race, the boss 42 having an inwardly-extending retaining flange 56.

The back cover 12 of the casing is secured to an electric motor 76 with the
15 drive shaft connected via an eccentric 78 to the bearing 54 through the back cover 12. The eccentric 78 has a knurled portion 79 to fit into the wobble plate 40 with the drive shaft of the motor locating in bore 81. The motor 76 has a mounting bracket 56 with a series of mounting feet 58 fitted thereto, the feet 58 each being substantially ovoid in plan and of resilient material to dampen vibratory movement. The greater
20 dimensioned end of each foot 58 has an upstanding headed stub pillar 60, the pillar 60 mating in an open slot 62 in the bracket 56. The slot 62 is narrower at its open end to hold the respective foot 58 in the slot. The feet 58 are similarly provided with two fixing holes 64 at their narrower end and being capable of rotating in and about their respective mating slot 62.

25 The valve housing 26 is fixed to the front cover 10 by a screw (not shown). An integral pressure switch is provided in the back cover 12 with the diaphragm plate 14 being provided with a fifth defined circular region 66, smaller than the other

regions 16, the rear diaphragm support plate 50 having a similarly shaped aperture 68 with wall surround to accommodate the circular region 66. A micro-switch (not shown) is retained in an enclosure 82 on the back cover 12 by an upstand 80 in the rear diaphragm support plate 50 is activated by movement of the fifth circular region 66 serving as a pressure switch pad, the electrical wires to the micro-switch being fed internally from the front face of the motor. The valve housing 26, on the same side as the inlet valve seats 34 are positioned, is provided with a track 70 between two inlet valve seats 34 leading from a hole 72 exiting on that side and centrally provided in the outlet valve seat 28 provided on the opposite side, the track 70 mating with a corresponding track 74 provided on the diaphragm plate 14. The mated tracks 70, 74 form a passage between the hole 72 and the fifth circular region 66 whereby any fluid leaving the outlet chamber 24 when under pressure through the screw travels along the passage and fills a void at the pressure pad on the opposite side of the diaphragm plate 14 from the pressure switch causing activation of the micro-switch to stop the pump.

In use, with the inlet and outlet ports connected to a supply source and a demand requirement and the motor connected up to a supply of electricity, the pump can be switched on to pump, in an even flow, fluid, normally water, from the supply source. The motor drives the wobble plate to nutate and reciprocate the piston sections and circular regions of the diaphragm plate in a pumping action.

Variations and modifications can be made without departing from the scope of the invention described above.

117

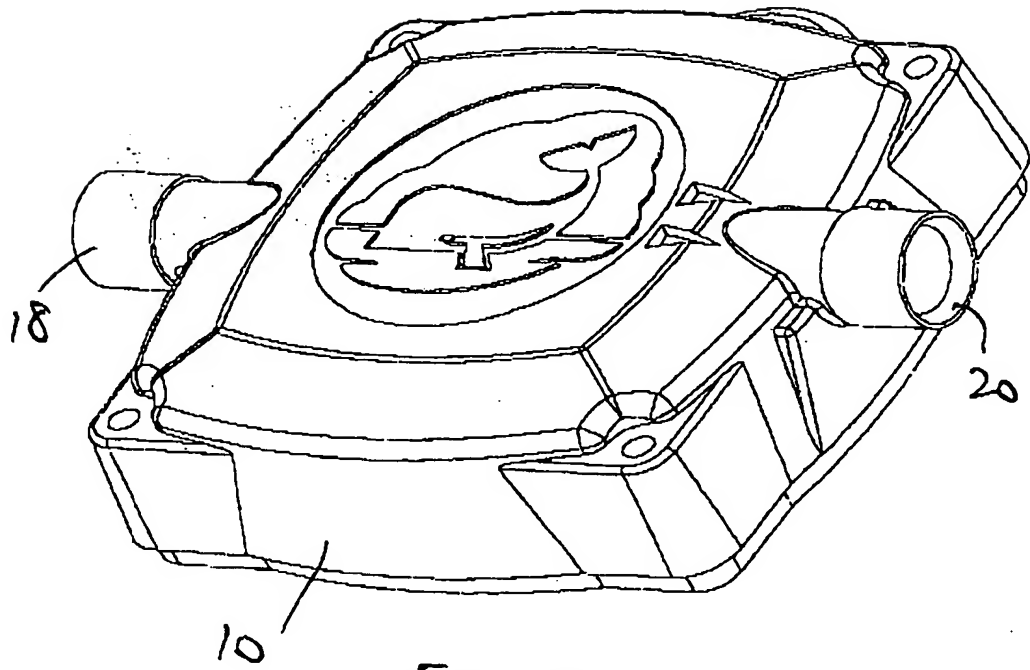


FIG. 1A

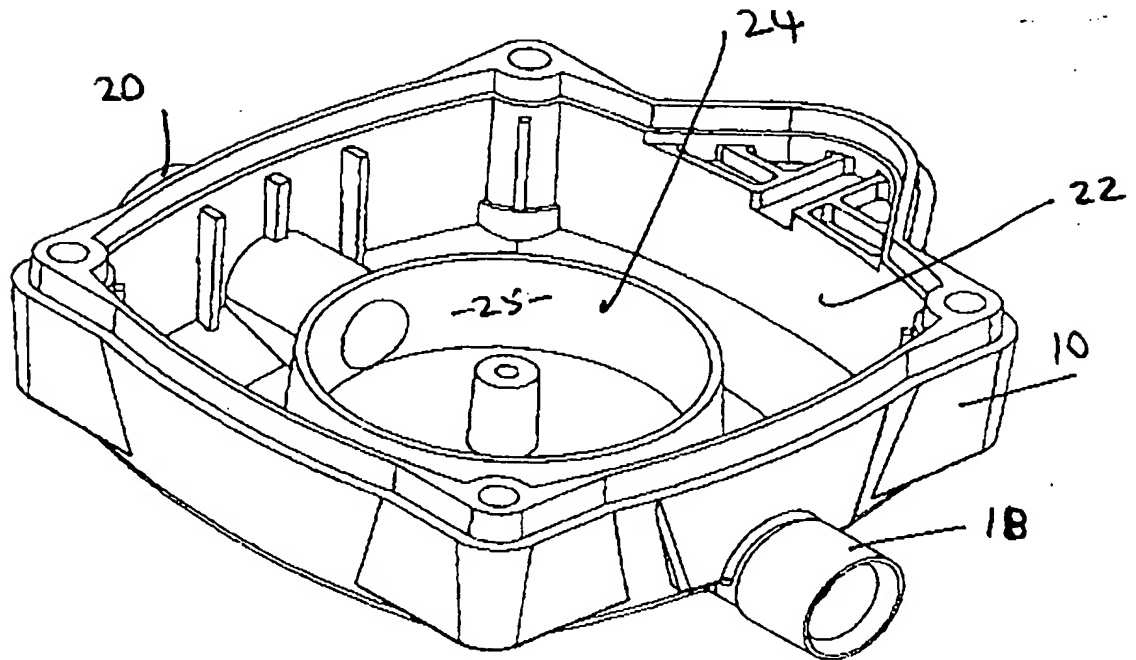


FIG. 1B

THIS PAGE BLANK (USPTO)

2/7

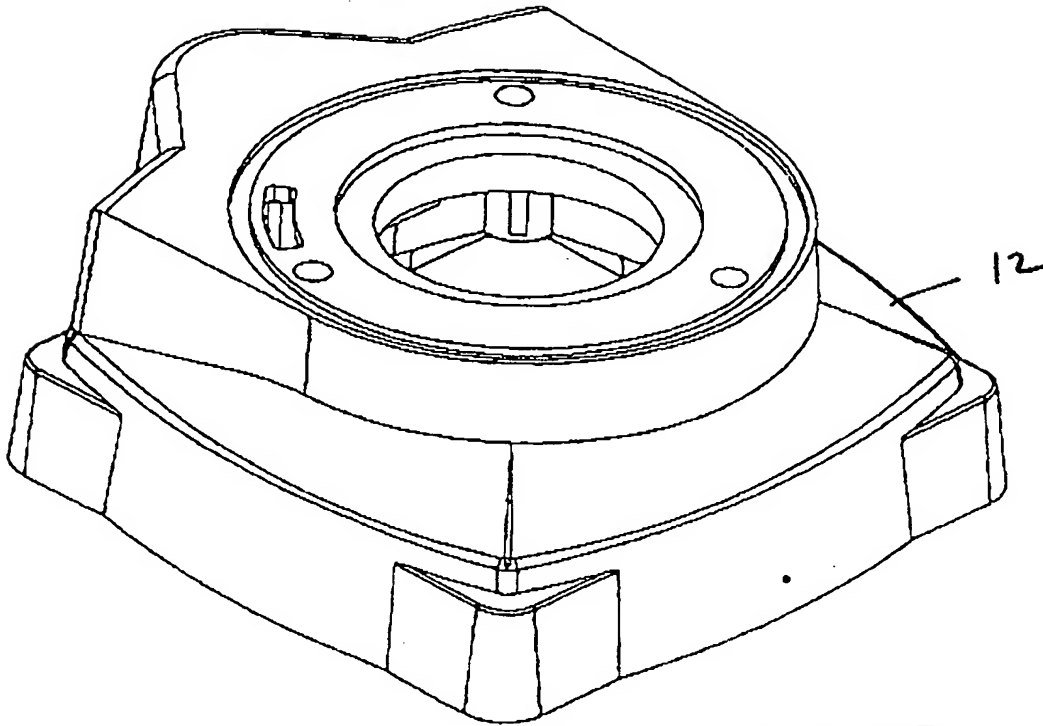


FIG. 2 B

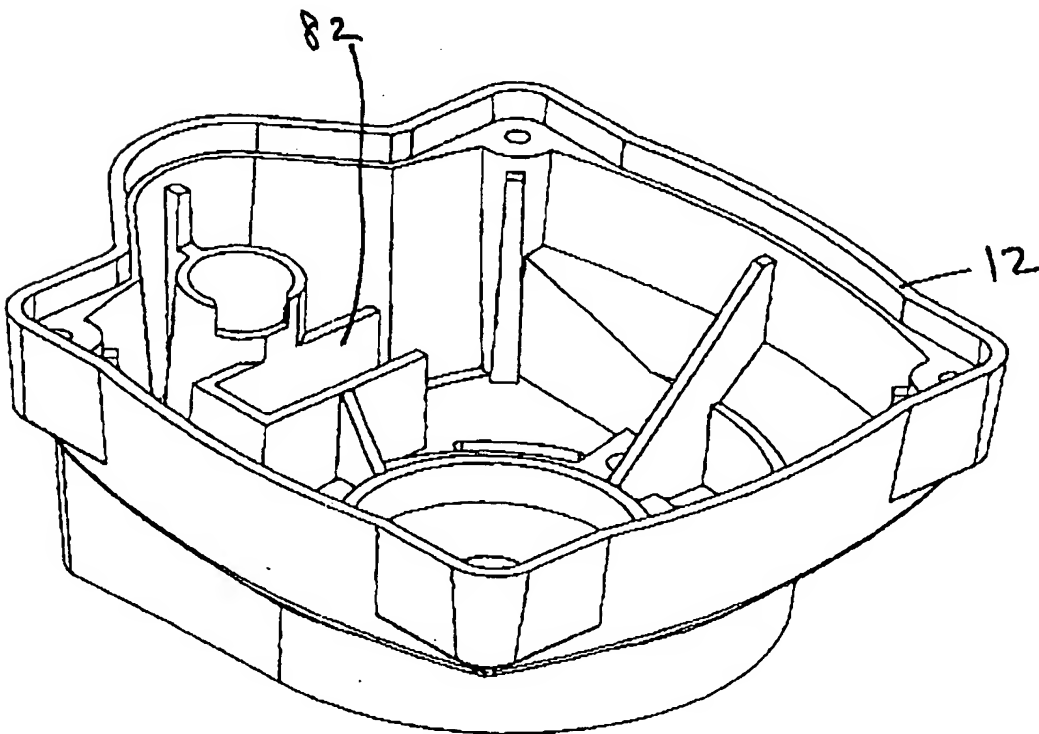


FIG. 2 A

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)

4/7

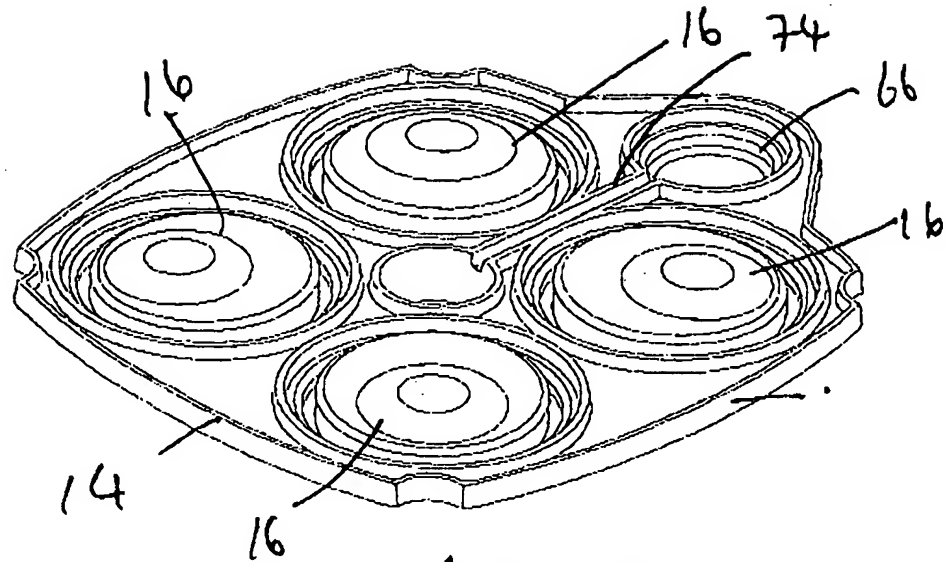


FIG. 4A



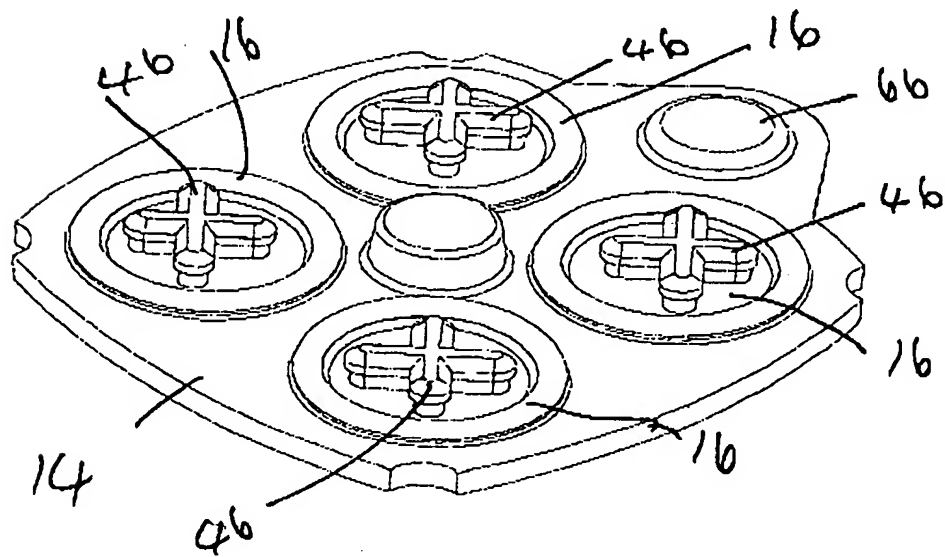


FIG. 4B

THIS PAGE BLANK (USPTO)

5/7

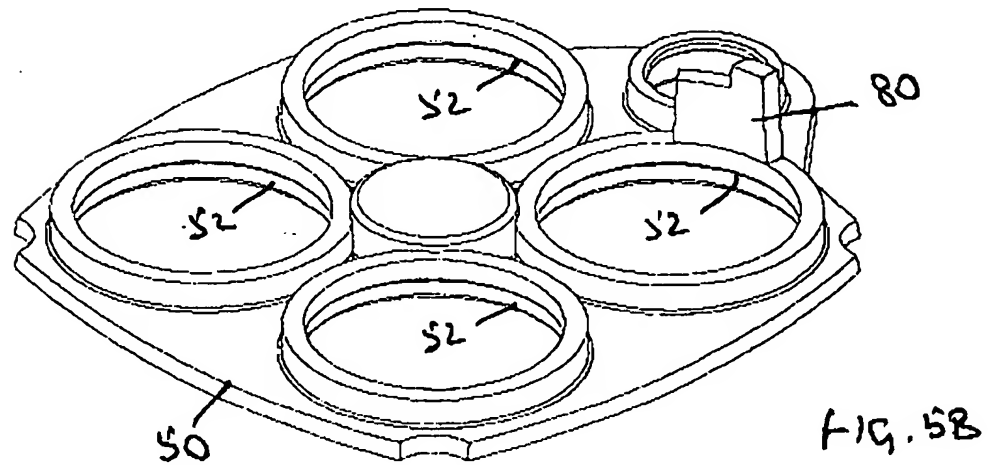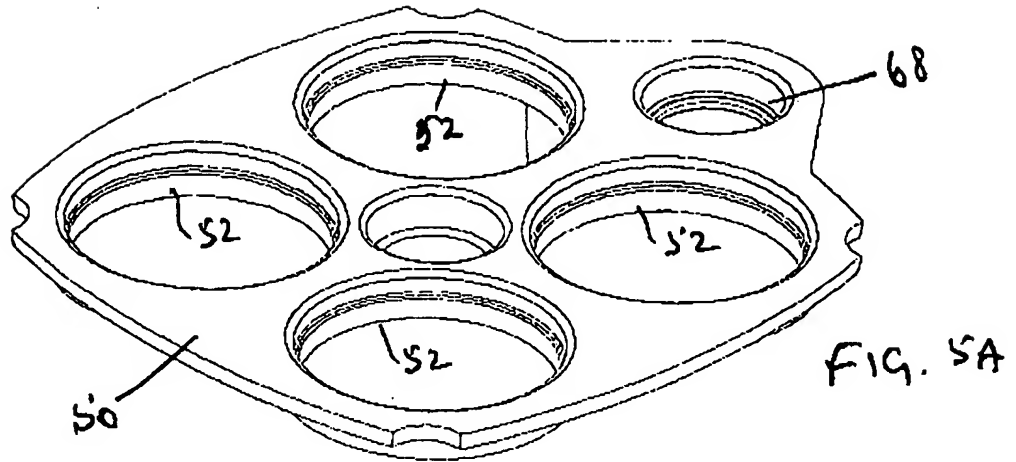

THIS PAGE BLANK (USPTO)

6/7

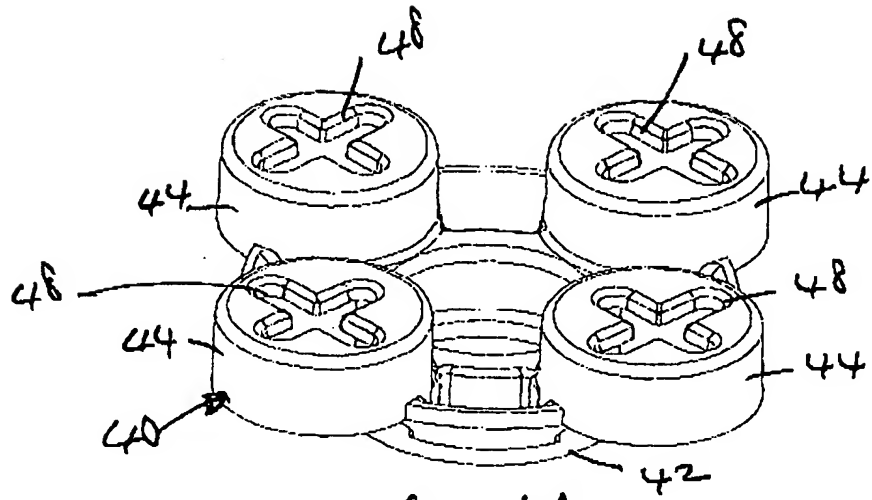


FIG. 6A

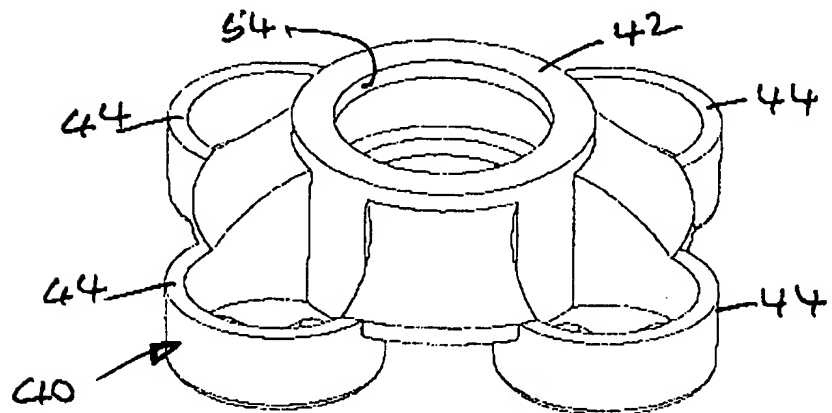


FIG. 6B

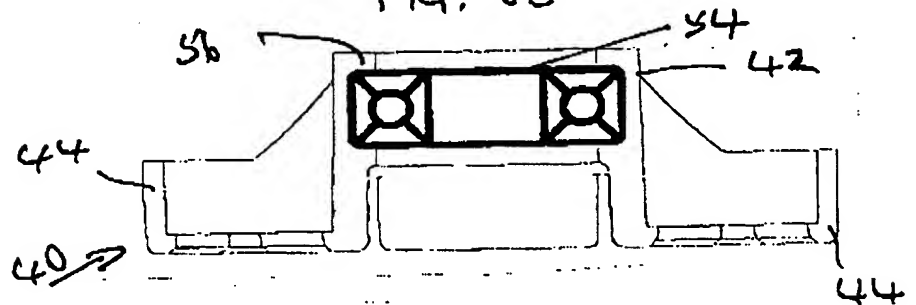


FIG. 6C

THIS PAGE BLANK (USPTO)

7/7

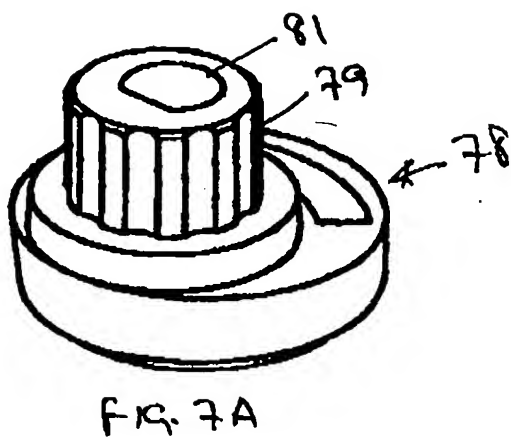


FIG. 7A

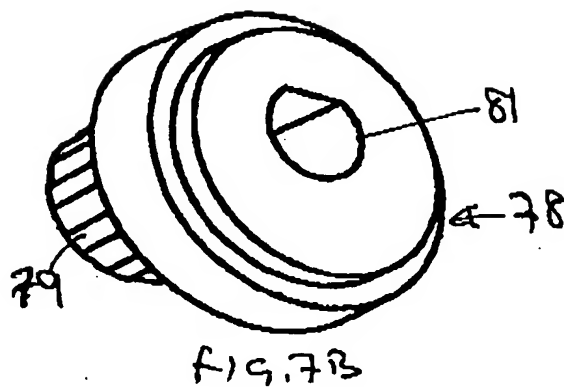


FIG. 7B

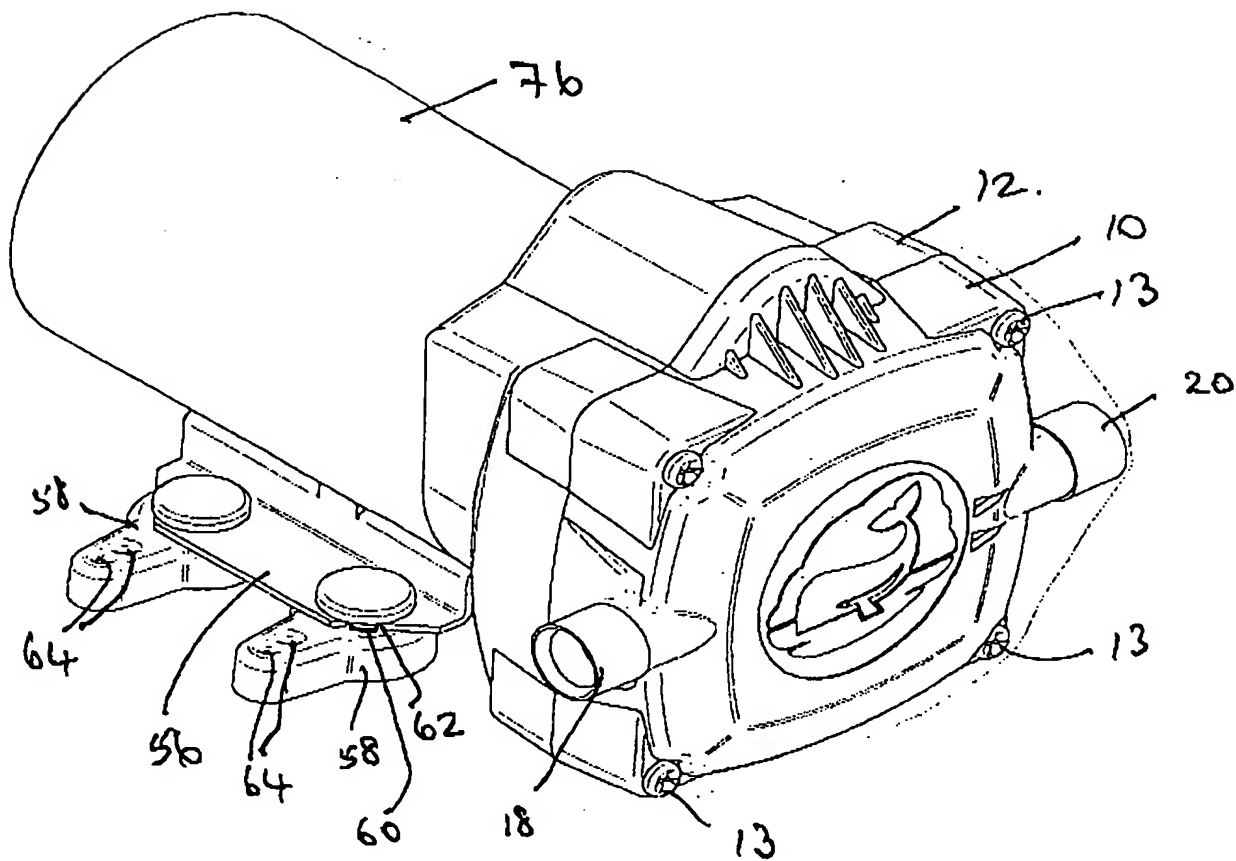


FIG. 8

PC7/ CB.00/02868

23. 8. 00

Robertson

Robert - Bruce Jones

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)